

F-621S

ELECTRIC STRIKE FOR PUSHBAR




Product Features

Felix F-621S is suitable for fire exit door with Push-rod lock. The operating principle of electric strike is that electromagnetism produces the force to pull or push the release lever so that to lock or open the door.

Technical Specifications



Model	F-621S
Holding Force	2200 lbs
Lock Tongue Structure	304 Stainless Steel
Voltage	DC12V or DC24V
Current	12V/220mA or 24V/110mA
Signal Output	Lock Status Output NO/NC/COM
Special Design	Applies to all brands of fire push rod lock supporting
Suitable for	Rod lock fire door
Surface Temperature	Within +20°C
Suitable Temperature	-10°C~+55°C
Operating Humidity	0~90%(non-condensing)
Face Plate Housing	High temperature paint
Lock Tongue	Surface by coating nickel
The Door Open	90 degrees
Lock Size	0.75kg

Dimension

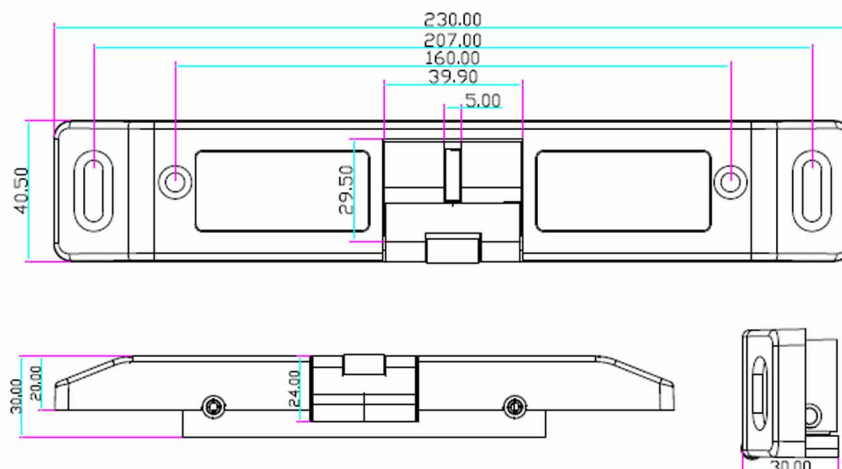

Signal Output

N.C. contact or access relay for fail safe setting.
 N.O. contact or access relay for fail secure setting.

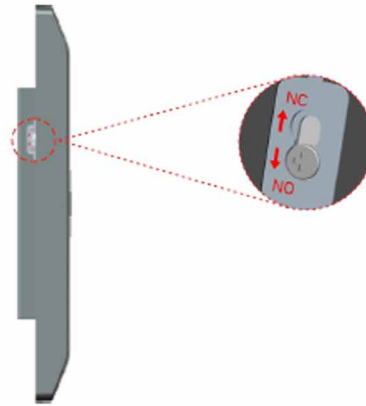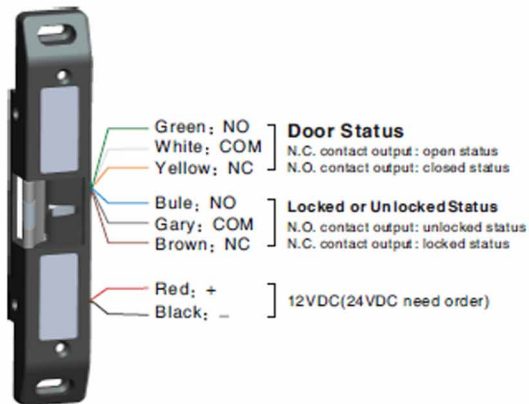

Alternate fail safe and fail secure(adjustable)

Procedure:

1. Unscrew.
2. Move the screw to another side.
3. Screw.

Installation

