

FB-300LU

ELECTRIC DROP BOLT FOR FRAMELESS GLASS DOOR




Product Features

- Integrated surface-mounted designed for easy installation.
- Suitable for frameless glass door (thickness of 9mm~12mm).
- Built-in microcontroller. Automatic current output control to cut down power consumption and lower the temperature of the lock body.
- Adjustable lock time(0 sec. & 3 sec.).
- Lock indicator is available for lock status.

Technical Specifications

Model	FB-300LU
Face Plate Material	High aluminum, Carrulous line finished
Holding Force	1000kg
Feature	Electric power lock/ unlock, Fail safe Adjustable time delay 0,3,6 sec
Voltage	DC 12/24V
Start Current	900mA
Standby Current	250mA
Solid Bolt	Polishing housing
Bolt	17mm
Induction Distance	6mm
Face Plate	150x43x39mm
Weight	600g

Dimension

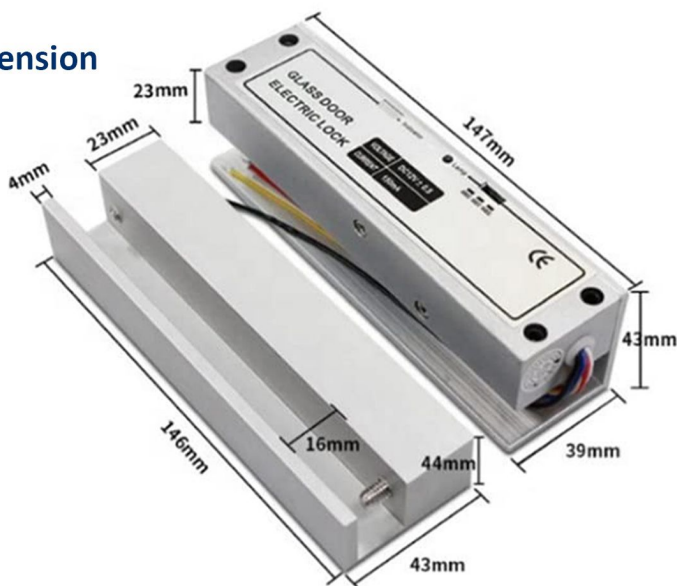

Installation

